

# "YAMAYO" MEASURING TOOLS - Japan

Since 1906 YAMAYO has exerted themselves to benefit the world through the achievement and assurance of reliable "Length". All YAMAYO products are of JIS first Grade.

## STILON REEL

20 -50m  
(ABS Open Reel)  
NR 20  
NR 30  
NR 50





## NO. S 75-1 "YAMAYO" STILON REEL, NYLON COATED STEEL TAPE MEASURE

YAMAYO invented and developed nylon-coated steel tape in 1966, first in the world. The 0.5mm thickness and 10mm width tape is made of tough and flexible steel core to ensure consistent accuracy and strength. Nylon coating protects against rust, corrosion and abrasion. All markings are printed with special permeating ink, resistant to abrasion. Standard tension 5kgf (50N). Suitable for underwater measurement, harbour construction and civil engineering.

Item No.	Model No.	Length (m)	Price (pc)
075-01-NR020	STILON REEL NR 20	20	
075-01-NR030	STILON REEL NR 30	30	
075-01-NR050	STILON REEL NR 50	50	
075-01-NR100	STILON REEL NR 100 (metal reel)	100	

## STILON REEL

100m  
(Metal Open Reel)  
NR 100

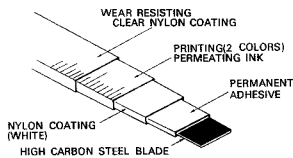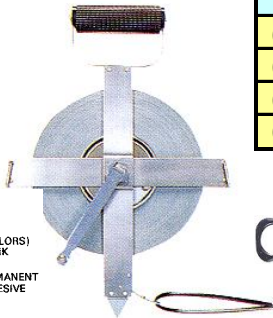

Markings on front side only.  
Zero Point



## NO. S 75-2 "YAMAYO" 3X STILON , NYLON COATED STEEL TAPE MEASURE

Similar to Stilon Reel but come with special winding gear system: 3 times quicker winding speed than conventional tape measure.

Item No.	Model No.	Length (m)	Price (pc)
075-02-NR50X	3X STILON 50M	50	



3X STILON  
50m

Special Winding Gear System

Markings on front side only.  
Zero Point



## SILVER CUSTOM

(ABS Case)  
VC 10  
VC 20  
VC 30



## NO. S 75-3 "YAMAYO" SILVER TAPE, METALLIC COATING STEEL TAPE MEASURE

Epoxy resin-painted steel tape with 13mm width and 0.27mm thickness. Standard tension 5kgf (50N). Superior abrasion, acid and rust resistance. Non-glare silver tape avoids reflected light.

Item No.	Model No.	Length (m)	Price (pc)
075-03-VC10	SILVER CUSTOM VC 10	10	
075-03-VC20	SILVER CUSTOM VC 20	20	
075-03-VC30	SILVER CUSTOM VC 30	30	
075-03-VR30	SILVER SEVEN VR 30	30	
075-03-VR50	SILVER SEVEN VR 50	50	

## SILVER SEVEN

(ABS REEL)  
VR 30  
VR 50



Markings on front side only.  
Zero Point



# "YAMAYO" MEASURING TOOLS - Japan

## NO. S 75-4 "YAMAYO" PVC COATED FIBERGLASS TAPE MEASURE



**MILLION 12 CUSTOM**  
MCT 20  
MCT 30  
MCT 50






**MILLION 12 OPEN REEL**  
OTR 30  
OTR 50  
OTR 100


12.5mm wide, 0.45mm thick narrow tape for stabilized measurement with less wind pressure. Standard tension 2kgf (20N). High electric insulation; excellent water, thermal and chemical resistance. All have rigid ABS resin cases.

Item No.	Model No.	Length (m)	Price (pc)
075-04-MCT020	MILLION 12 CUSTOM MCT 20	20M	
075-04-MCT030	MILLION 12 CUSTOM MCT 30	30M	
075-04-MCT050	MILLION 12 CUSTOM MCT 50	50M	
075-04-OTR030	MILLION 12 OPEN REEL OTR 30	30M	
075-04-OTR050	MILLION 12 OPEN REEL OTR 50	50M	
075-04-OTR100	MILLION 12 OPEN REEL OTR 100	100M	

EASY TO CLEAN    SUPERIOR DURABILITY WEATHER RESISTANT    NON-CONDUCTIVE



Metric / Metric on both sides (Front and Reverse)

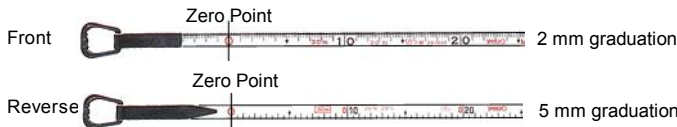

## NO. S 75-5 "YAMAYO" NYLON COATED STEEL ROD MINI-ROD / MINI-ROD-C

### MINI-ROD


Useful for construction site photo records. Tape can be taken out from case to use as levelling staff in levelling work and land surveys. Nylon coated steel rod. Graduated in 5mm w/red & white pole pattern marked every 20cm on front side and in 5mm w/red line marked every 10cm on reverse side.

### MINI-ROD-C

Useful for photo records, normal measuring and vertical measuring. Tape can be taken out to use as levelling staff in levelling work and land surveys. Nylon coated steel rod. Graduated in 1mm w/black & red figurings on front side and 5mm w/red & white pole pattern marked 20cm on reverse side.



**ML1**  
**(MINI-ROD)**

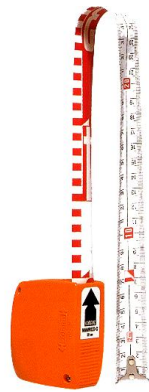


**ML2**  
**(MINI-ROD-C)**

Item No.	Model No.	Length (m)	Width (mm)	Price (pc)
075-05-ML1	MINI-ROD ML-1	2	25	
075-05-ML2	MINI-ROD-C ML-2	2	25	

## NO. S 75-6 "YAMAYO" PVC COATED FIBERGLASS DIAMETER TAPE

Million 12 Diameter Tape.

12.5mm wide, 0.45mm thick with orange ABS resin custom case. Standard Tension 2kgf (20N). For measuring the circumference of circular objects, diameter and ordinary measurements.

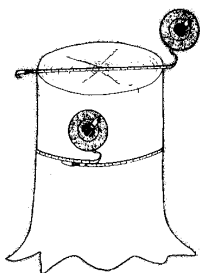

**D3M**  
**D5M**



Item No.	Model No.	Length	Price (pc)
075-06-D3M	D-3M	10 m x 3 m dia.	
075-06-D5M	D-5M	20 m x 5 m dia.	


# "YAMAYO" MEASURING TOOLS - Japan



**MSR 30**  
**MSR 50**  
**MSR 100**

## NO. S 75-7 "YAMAYO" PVC COATED FIBREGLASS MILLION MEASUREMENT ROPE

6mm width, 2mm thickness, standard tension 2kgf (20N), 10mm graduation. Made of highest grade glass fiber with double P.V.C. coating for superior abrasion resistivity and tensile strength. For measurement in mountains, forests, water surfaces, harbours and piling projects.

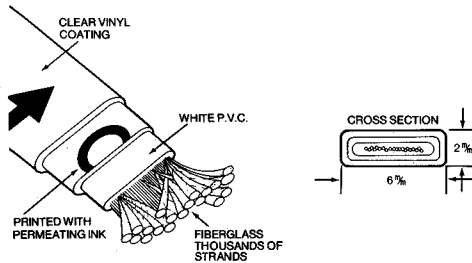

Item No.	Model No.	Length	Price (pc)
075-07-MSR030	MSR 30	30 m	
075-07-MSR050	MSR 50	50 m	
075-07-MSR100	MSR 100	100 m	



You can use optionally supplied belts on your back for your easy moving.




**RWL100M**

## NO. S 75-8 "YAMAYO" PVC COATED FIBREGLASS WATER LEVEL MEASURE

Measures water level by direct reading on the graduation of tape according to the signals of electricity, sound or light. Earthed line is not necessary when measuring.

Item No.	Length	Weight (kg)	Voltage	Power Source	Price (pc)
075-08-RWL100M	100m	3.1	3V	UM-3x2pcs	

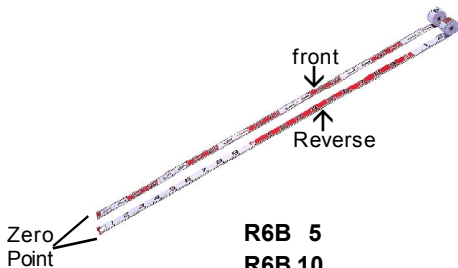

**R6B 5**  
**R6B 10**  
**R15B 3**  
**R15B 5**  
**R15B 10**

## NO. S 75-9 "YAMAYO" RIBBON ROD

Front - Graduated on both edges. Graduated and marked on vertical position. White and red background in every 20cm interval.

Reverse - Graduated on one edge and marked on horizontal position. Red & white background in every 1 meter interval.

Item No.	Length	Width	Thickness	Graduation	Price (pc)
075-09-R06B05	5m	60mm	0.65mm	5mm	
075-09-R06B10	10m	60mm	0.65mm	5mm	
075-09-R15B03	3m	150mm	0.65mm	5mm	
075-09-R15B05	5m	150mm	0.65mm	5mm	
075-09-R15B10	10m	150mm	0.65mm	5mm	




**SK 10K**

## NO. S 75-10 "SK" TUBULAR SCALE

For general weighing, force and tension measurements. All scales are individually calibrated and accurate within  $\pm 1$  graduation. Made of light-weight, rust-free hard aluminium with chrome-plated handle and hook.

Item No.	Capacity	Graduation	Price (pc)
075-10-SK10K	10 kgs	100 g	


# "TOKYO RIKA" / "METER-MAN" MEASURING TOOLS

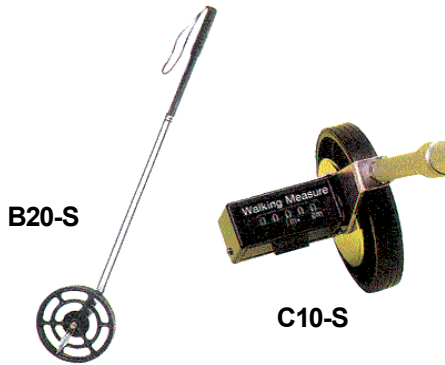

## NO. S 75-16 "TOKYO RIKA" SINGLE WHEEL WALKING MEASURE MODEL B20-S / C10S (JAPAN)

Model B20-S comes with 20cm diameter wheel, measure range up to 10km at 10cm graduation. Model C10S comes with 10cm diameter wheel, measure range up to 1km at a 1cm graduation. Both models with telescopic handle.

Item No.	Wheel Dia. (cm)	Digit	Graduation	Measuring Range	Wt. (kg)	Price (pc)
075-16-B20S	20	5	10 cm	0.1m - 10km	1.0	
075-16-C10S	10	5	1 cm	0.01m - 1km	0.7	

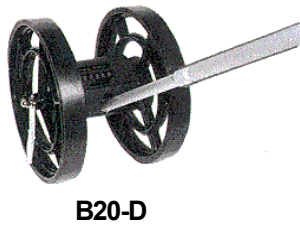

## NO. S 75-17 "TOKYO RIKA" DOUBLE WHEEL WALKING MEASURE MODEL B20-D (JAPAN)

Similar to single wheel walking measure, but comes with two wheels.

Item No.	Wheel Dia. (cm)	Digit	Graduation	Measuring Range	Wt. (kg)	Price (pc)
075-17-B20D	20	5	10 cm	0.1m - 10km	1.6	



## NO. S 75-18 "TOKYO RIKA" DIGITAL WALKING MEASURE WITH MICRO COMPUTER MODEL F-20

Model F-20 consists of a micro computer counter with LC-display. Easy use with measuring range of 0.1m - 1,000km. Measurements by meter, foot, or yard can be converted directly.

- \* 7 digit liquid crystal display indicates choice of meters, feet or yards
- \* Direct unit conversion of measurement.
- \* Measurement range from 0.1m to 1000km.
- \* Height : 890 mm.

Item No.	Wheel Dia. (cm)	Digit	Graduation	Measuring Range	Wt. (kg)	Price (pc)
075-18-F20	20	7	10 cm	0.1m - 1000km	2.3	



## NO. S 76-2 "METER-MAN" MEASURING WHEEL W31M (USA)

The 10 inch diameter wheel is large enough for smooth ground applications, yet small enough for indoor use and convenient storage. A 5 digit counter permits long distance measuring.

Comes equipped with convenient kickstand.

Item No.	Wheel Dia. (Inch)	Digit	Graduation	Measuring Range	No. of Wheels	Price (pc)
076-02-W31M	10	5	10 cm	10 cm - 10 km	1	