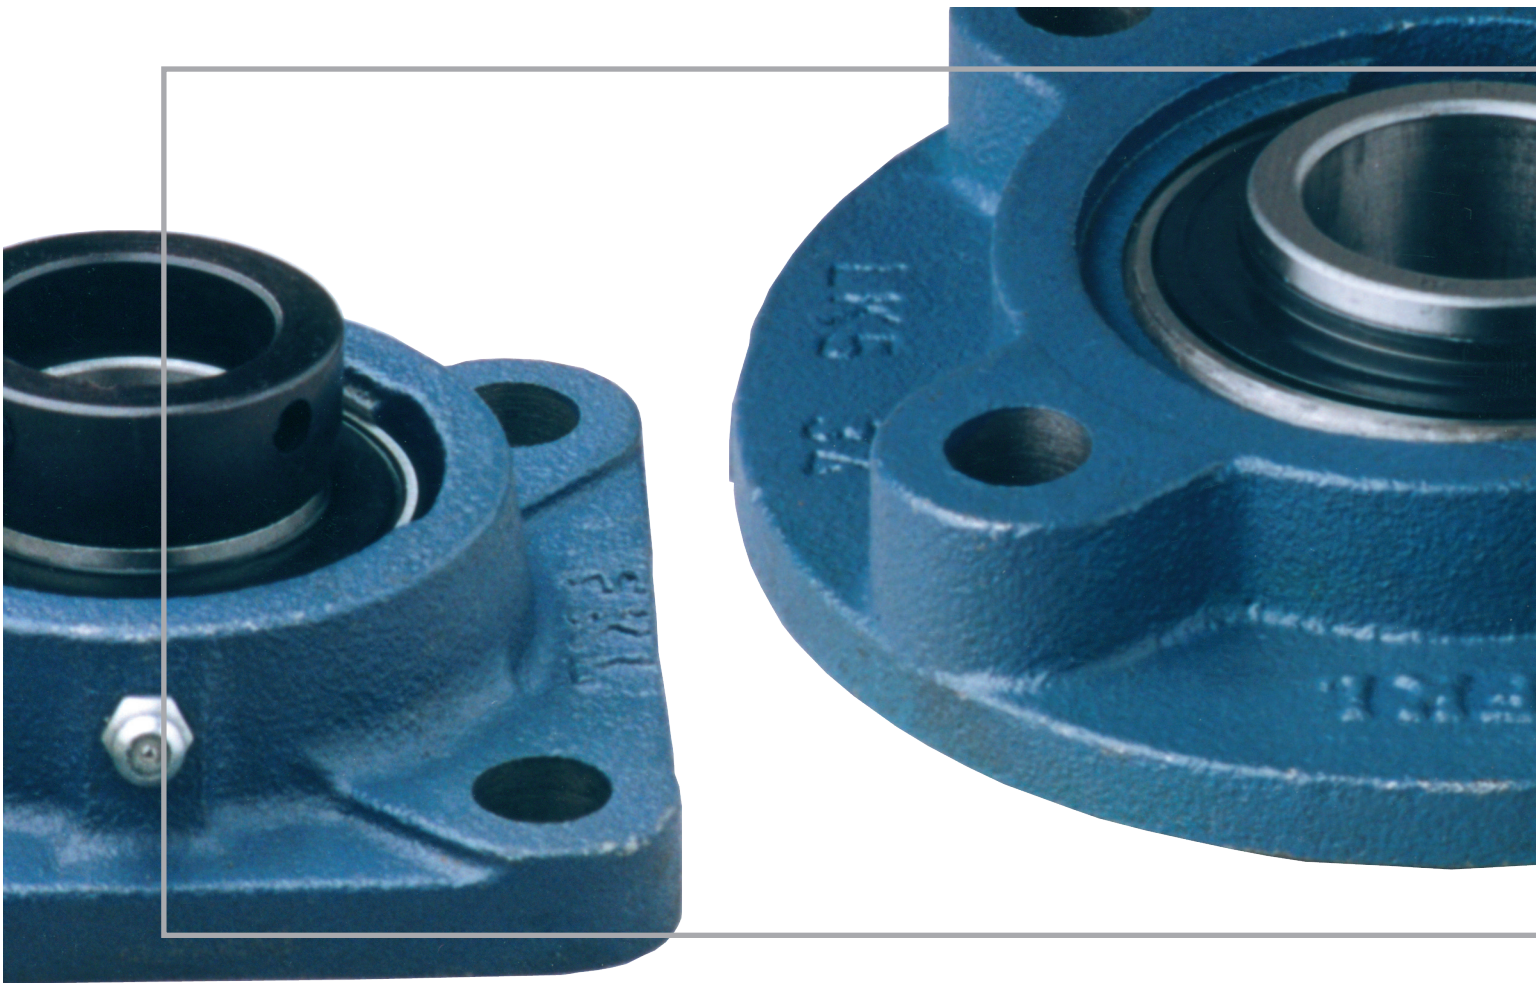













Y - bearing units











Ležajne **jedinice**

FKL[®] 

										
S SY(J) SG ASE P P	V SYFJ - - PA UP	U SYF - SHE - -	F FY(J) FG56 CF/CJ F F	N FYT - CFT/CJT FL FL	G FYC FG16 FE FC FC	T TU - - T T T	C PF FB MSB PF PF PF	D PFD - MSTR PFT -	P PFT FBB MST PFL PFL	R P SB B/T PP PP
UES SY(J).RM - PASEY UBP ASP	UEV SYFJ.RM - - UBPA ASUP	UEU SYF.RM - PSHEY -	UEF FY(J).RM - PCJY UBF ASF	UEN FYT.RM - PCJTY UBFL ASFL	UEG FYC.RM - - UBFC ASFC	UET TU.RM - - UBT AST	UEC PF.RM - RAY UBPF ASPF	UED PFD.RM - PARTRY -	UEP PFT.RM - - RATY UBPFL ASPFL	UER P.RM - - PBYP UBPP ASPP
LES SY(J).TF SG562 RASEY UCP UCP	LEV SYFJ.TF - - UCPA UCUP	LEU SYF.TF - RSHEY -	LEF FY(J).TF FG562 RCJY UCF UCF	LEN FYT.TF - RCJTY UCFL UCFL	LEG FYC.TF - - UCFC UCFC	LET TU.TF - - UCT UCT	LEC PF.TF FB562 RAY -	LED PFD.TF - RRTRY -	LEP PFT.TF - - RRTY ENPFL AELPFL	LER P.TF - - -
UYS SY(J).FM SG162 PASE ENLP	UYV SYFJ.FM - - - AELUP	UYU SYF.FM - PSHE -	UYF FY(J).FM FG162 PCJ - AELF	UYN FYT.FM - PCJT - AELFL	UYG FYC.FM - - - AELFC	UYT TU.FM - PTUE ENT AELT	UYC PF.FM FB162 RA ENPF AELPF	UYD PFD.FM - RARTR -	UYP PFT.FM - RAT -	UYR (J) P.FM SB162 PB ENPP AELPP
LYS SY(J).WF SG362.B RASE EWP UELP	LYV SYFJ.WF - - EWPA UELUP	LYU SYF.WF - RSHE -	LYF FY(J).WF - RCJ EWF UELF	LYN FYT.WF - RCJT EWFL UELFL	LYG FYC.WF - RFE EWFC UELFC	LYT TU.WF - RTUE EWT UFLT	LYC PF.WF PB362.B RR -	LYD PFD.WF - RRTR -	LYP PFT.WF - RRT -	LYR P.WF - -
USS SG 762.B - - - -	USV - - - - -	USU - - - - -	USF - FG762.B - - -	USN - - - - -	USG - - - - -	UST - - - - -	USC - FB762.B - - -	USD - - - - -	USP - - - - -	USR - SB762.B - - -
LSS - - - - -	LSV - - - - -	LSU - - - - -	LSF - - - - -	LSN - - - - -	LSG - - - - -	LST - - - - -	LSC - - - - -	LSD - - - - -	LSP - - - - -	LSR - - - - -
UKS - - - - -	UKV - - - - -	UKU - - - - -	UKF - - - - -	UKN - - - - -	UKG - - - - -	UKT - - - - -	UKC - - - - -	UKD - - - - -	UKP - - - - -	UKR - - - - -
LKS SY(J).KF - - UKP UKP	LKV SYFJ.KF - - UKPA UKUP	LKU SYF.KF - - -	LKF FY(J).KF - - UKF UKF	LKN LYN.KF - - UKFL UKFL	LKG FYC.KF - - UKFC UKFC	LKT TU.KF - - UKT UKT	LKC - - - -	LKD - - - -	LKP - - - -	LKR - - - -

LEGENDA/LEGEND

FKL
SKF
FAG
INA
NSK
NTN

UE YAT - GAY.NPPB UB AS	
LE YAR 562 GYE.KRRB UC UC	
UY YET 162 GRAE.NPPB EN AEL	
LY YEL 362.B GE.KRRB EW UEL	
US 17262 762.B - CS CS	
LS YFE - - -	
UK 3620 - - -	
LK YSA - - UK UK	

UPOREDNE OZNAKE Y - LEŽAJA I LEŽAJNIH JEDINICA
Y-Units: List of Equivalent Designations

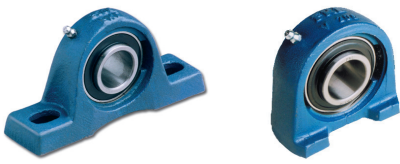
Y - LEŽAJNE JEDINICE

Y-Bearing Units


„Y-Ležajne jedinice“ predstavljaju osnovni program FKL-ove proizvodnje i karakteristiše ga:
 „Y-bearing units represent a main programme of the FKL production, which is characterized by:


- Usaglašenost sa ISO standardima
- *Compatibility with ISO standards*
- Asortiman podređen zahtevima tržišta i kupca
- *Market and customer focused range*
- Visok kvalitet i sigurnost isporuke
- *High product's quality and reliable delivery service*

Kako koristiti ovu publikaciju *How to use this publication*





S	V
203-204-205-206 207-208-209-210 211-212-213-214 215-216-218-220	204-205-206-207 208-209-210



UES 12-15-17-20-25 30-35-40-45-50 mm otvora <i>mm bore</i>	UEV 20-25-30-35-40 45-50 mm otvora <i>mm bore</i>	UE		UE 2 Veličine/Size: 03/12-03/15-03-04-05-06-07-08-09-10 - unutrašnji prsten sa prepustom samo na jednoj strani - <i>Inner ring extended on one side only</i> - stezanje pomoću priteznih vijaka - <i>Grub screw locking</i> - zaptivanje: metalogumena zaptivka - <i>Seals: Metal-rubber seal</i> - trajno podmazan litijum/kalcijum mazivom - <i>Long life lithium/calcium grease</i>
LES 12-15-17-20-25 30-35-40-45-50 55-60-65-70-75 80-90-100 mm otvora <i>mm bore</i>	LEV 20-25-30-35-40 45-50 mm otvora <i>mm bore</i>	LE		LE 2 Veličine/Size: 03/12-03/15-03-04-05-06-07-08-09-10-11-12 13-14-15-16-17-18-20-24 - unutrašnji prsten sa prepustom na obe strane - <i>Inner ring extended on both sides</i> - stezanje pomoću priteznih vijaka - <i>Grub screw locking</i> - zaptivanje: metalogumena zaptivka + zaštitni lim - <i>Seals: Metal-rubber seal + metal shield</i> - trajno podmazan litijum/kalcijum mazivom - <i>Long life lithium/calcium grease</i>

- Izabrati tip ležaja - UE, LE, UY...
 1. *Select the bearing type*
- Izabrati izvedbu kućišta - S, V, U, F...
 2. *Select the housing design*
- Proveriti nalazi li se izabrana jedinica u „Ležajna jedinica“
 3. *Check that the selected unit is in the „Y-units“*
- Odrediti oznaku jedinice, npr. LE 204 + V 204 = LEV 204
 4. *Determine the unit designation,*
 Example: LE 204+V 204=LEV 204

Y-LEŽAJI I LEŽAJNE JEDINICE



S			V			U			F			N		
203-204-205-206 207-208-209-210 211-212-213-214 215-216-218-220			204-205-206-207 208-209-210			204-205-206-207 208-209-210			203-204-205-206 207-208-209-210 211-212-213-214 215-216-218-220			203-204-205-206 207-208-209-210 211-212		
UES 12-15-17-20-25 30-35-40-45-50 mm otvora mm bore			UEV 20-25-30-35-40 45-50 mm otvora mm bore			UEU 20-25-30-35-40 45-50 mm otvora mm bore			UEF 12-15-17-20-25 30-35-40-45-50 mm otvora mm bore			UEN 12-15-17-20-25 30-35-40-45-50 mm otvora mm bore		
LES 12-15-17-20-25 30-35-40-45-50 55-60-65-70-75 80-90-100 mm otvora mm bore			LEV 20-25-30-35-40 45-50 mm otvora mm bore			LEU 20-25-30-35-40 45-50 mm otvora mm bore			LEF 12-15-17-20-25 30-35-40-45-50 55-60-65-70-75 80-90-100 mm otvora mm bore			LEN 12-15-17-20-25 30-35-40-45-50 55-60 mm otvora mm bore		
UYS 12-15-17-20-25 30-35-40-45-50 55-60 mm otvora mm bore			UYV 20-25-30-35-40 45-50 mm otvora mm bore			UYU 20-25-30-35-40 45-50 mm otvora mm bore			UYF 12-15-17-20-25 30-35-40-45-50 55-60 mm otvora mm bore			UYN 12-15-17-20-25 30-35-40-45-50 55-60 mm otvora mm bore		
LYS 12-15-17-20-25 30-35-40-45-50 55-60-65-70-75 80-90-100 mm otvora mm bore			LYV 20-25-30-35-40 45-50 mm otvora mm bore			LYU 20-25-30-35-40 45-50 mm otvora mm bore			LYF 12-15-17-20-25 30-35-40-45-50 55-60-65-70-75 80-90-100 mm otvora mm bore			LYN 12-15-17-20-25 30-35-40-45-50 55-60 mm otvora mm bore		
USS 17-20-25-30-35 40-45-50-55-60 mm otvora mm bore			USV 20-25-30-35-40 45-50 mm otvora mm bore			USU 20-25-30-35-40 45-50 mm otvora mm bore			USF 17-20-25-30-35 40-45-50-55-60 mm otvora mm bore			USN 17-20-25-30-35 40-45-50-55-60 mm otvora mm bore		
LSS 25-30-35-40-45 50-55 mm otvora mm bore			LSV 25-30-35-40-45 50 mm otvora mm bore			LSU 25-30-35-40-45 50 mm otvora mm bore			LSF 25-30-35-40-45 50-55 mm otvora mm bore			LSN 25-30-35-40-45 50-55 mm otvora mm bore		
UKS 25-30-35-40-45 50-55-60-65-75 80-85-90 mm otvora mm bore			UKV 25-30-35-40-45 50 mm otvora			UKU 25-30-35-40-45 50 mm otvora			UKF 25-30-35-40-45 50-55-60-65-75 80-85-90 mm otvora			UKN 25-30-35-40-45 50-55-60 mm otvora		
LKS 25-30-35-40-45 50-55-60-65-75 80-85-90 mm otvora mm bore			LKV 25-30-35-40-45 50 mm otvora mm bore			LKU 25-30-35-40-45 50 mm otvora mm bore			LKF 25-30-35-40-45 50-55-60-65-75 80-85-90 mm otvora mm bore			LKN 25-30-35-40-45 50-55-60 mm otvora mm bore		

Y - BEARINGS AND BEARING UNITS



G

T

C

D

P

204-205-206-207
208-209-210-211
212-213

204-205-206-207
208-209-210-211
212-213-214

203-204-205-206
207-208-209-210
211-212

203-204-205-206
207-208

203-204-205-206
207-208

UEG

20-25-30-35-40
45-50

mm otvora *mm bore*

UET

20-25-30-35-40
45-50

mm otvora *mm bore*

UEC

12-15-17-20-25
30-35-40-45-50

mm otvora *mm bore*

UED

12-15-17-20-25
30-35

mm otvora *mm bore*

UEP

12-15-17-20-25
30-35-40

mm otvora *mm bore*

LEG

20-25-30-35-40
45-50-55-60-65

mm otvora *mm bore*

LET

20-25-30-35-40
45-50-55-60-65
70

mm otvora *mm bore*

LEC

12-15-17-20-25
30-35-40-45-50
55-60

mm otvora *mm bore*

LED

12-15-17-20-25
30-35

mm otvora *mm bore*

LEP

12-15-17-20-25
30-35-40

mm otvora *mm bore*

UYG

20-25-30-35-40
45-50-55-60

mm otvora *mm bore*

UYT

20-25-30-35-40
45-50-55-60

mm otvora *mm bore*

UYC

12-15-17-20-25
30-35-40-45-50
55-60

mm otvora *mm bore*

UYD

12-15-17-20-25
30-35

mm otvora *mm bore*

UYP

12-15-17-20-25
30-35-40

mm otvora *mm bore*

LYG

20-25-30-35-40
45-50-55-60-65

mm otvora *mm bore*

LYT

20-25-30-35-40
45-50-55-60-65
70

mm otvora *mm bore*

LYC

12-15-17-20-25
30-35-40-45-50
55-60

mm otvora *mm bore*

LYD

12-15-17-20-25
30-35

mm otvora *mm bore*

LYP

12-15-17-20-25
30-35-40

mm otvora *mm bore*

USG

20-25-30-35-40
45-50-55-60

mm otvora *mm bore*

UST

20-25-30-35-40
45-50-55-60

mm otvora *mm bore*

USC

17-20-25-30-35
40-45-50-55-60

mm otvora *mm bore*

USD

17-20-25-30-35

mm otvora *mm bore*

USP

17-20-25-30-35
40

mm otvora *mm bore*

LSG

25-30-35-40-45
50-55

mm otvora *mm bore*

LST

25-30-35-40-45
50-55

mm otvora *mm bore*

LSC

25-30-35-40-45
50-55

mm otvora *mm bore*

LSD

25-30-35

mm otvora *mm bore*

LSP

25-30-35-40

mm otvora *mm bore*

UKG

25-30-35-40-45
50-55-60-65

mm otvora *mm bore*

UKT

25-30-35-40-45
50-55-60

mm otvora *mm bore*

LKG

25-30-35-40-45
50-55-60-65

mm otvora *mm bore*

LKT

25-30-35-40-45
50-55-60

mm otvora *mm bore*



R

203-204-205-206
207-208-209

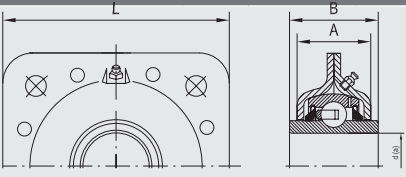




LEŽAJI Bearings

<p>UER 12-15-17-20-25 30-35-40-45</p> <p>mm otvora mm bore</p>
<p>LER 12-15-17-20-25 30-35-40-45</p> <p>mm otvora mm bore</p>
<p>UYR 12-15-17-20-15 30-35-40-45</p> <p>mm otvora mm bore</p>
<p>LYR 12-15-17-20-25 30-35-40-45</p> <p>mm otvora mm bore</p>
<p>USR 17-20-25-30-35 40-45</p> <p>mm otvora mm bore</p>
<p>LSR 25-30-35-40-45</p> <p>mm otvora mm bore</p>

<p>UE</p>	<p>UE 2 Veličine/Size: 03/12-03/15-03-04-05-06-07-08-09-10 - unutrašnji prsten sa prepustom samo na jednoj strani/<i>Inner ring extended on one side only</i> - stezanje pomoću priteznih vijaka/<i>Grub screw locking</i> - zaptivanje: metalogumena zaptivka/<i>Seals: Metal-rubber seal</i> - trajno podmazan litijum/kalcijum mazivom/<i>Long life lithium/calcium grease</i></p>
<p>LE</p>	<p>LE 2 Veličine/Size: 03/12-03/15-03-04-05-06-07-08-09-10-11-12 13-14-15-16-17-18-20-24 - unutrašnji prsten sa prepustom na obe strane/<i>Inner ring extended on both sides</i> - stezanje pomoću priteznih vijaka/<i>Grub screw locking</i> - zaptivanje: metalogumena zaptivka + zaštitni lim/<i>Seals: Metal-rubber seal + metal shield</i> - trajno podmazan litijum/kalcijum mazivom/<i>Long life lithium/calcium grease</i></p>
<p>UY</p>	<p>UY 2 Veličine/Size: 03/12-03/15-03-04-05-06-07-08-09-10-11-12 - unutrašnji prsten sa prepustom samo na jednoj strani/<i>Inner ring extended on one side only</i> - stezanje pomoću ekscentar prstena/<i>Eccentric locking collar</i> - zaptivanje: metalogumena zaptivka/<i>Seals: Metal-rubber seal</i> - trajno podmazan litijum/kalcijum mazivom/<i>Long life lithium/calcium grease</i></p>
<p>LY</p>	<p>LY 2 Veličine/Size: 03/12-03/15-03-04-05-06-07-08-09-10-11-12 13-14-15-16-18-20-24 - unutrašnji prsten sa prepustom na obe strane/<i>Inner ring extended on both sides</i> - stezanje pomoću ekscentar prstena/<i>Eccentric locking collar</i> - zaptivanje: metalogumena zaptivka + zaštitni lim/<i>Seals: Metal-rubber seal + metal shield</i> - trajno podmazan litijum/kalcijum mazivom/<i>Long life lithium/calcium grease</i></p>
<p>US</p>	<p>US 2 Veličine/Size: 03-04-05-06-07-08-09-10-11-12 - unutrašnji prsten bez prepusta/<i>Inner ring and outer ring same width</i> - stezanje tesnim naleganjem/<i>Locking by interference on the shaft</i> - zaptivanje: metalogumena zaptivka/<i>Seals: Metal-rubber seal</i> - trajno podmazan litijum/kalcijum mazivom/<i>Long life lithium/calcium grease</i></p>
<p>LS</p>	<p>LS 2 Veličine/Size: 05-06-07-08-09-10-11 - unutrašnji prsten sa prepustom na obe strane/<i>Inner ring extended on both sides</i> - stezanje tesnim naleganjem/<i>Locking by interference on the shafts</i> - zaptivanje: metalogumena zaptivka + zaštitni lim/<i>Seals: Metal-rubber seal + metal shield</i> - trajno podmazan litijum/kalcijum mazivom/<i>Long life lithium/calcium grease</i></p>
<p>UK</p>	<p>UK 2+H Veličine/Size: 05-06-07-08-09-10-11-12-13-14-15-16-17-18 - provrt redukovan za jednu veličinu sedlom za pritezanje/<i>Bore reduced one size by adapter sleeve</i> - standardno sedlo za pritezanje serije X23(00)/<i>Standard adapter sleeve series H23 (00)</i> - zaptivanje: metalogumena zaptivka/<i>Seals: Metal-rubber seal</i> - trajno podmazan litijum/kalcijum mazivom/<i>Long life lithium/calcium grease</i> - ležaj i sedlo za pritezanje treba naručiti odvojeno/<i>Bearing and adapter sleeve to be ordered separately</i></p>
<p>LK</p>	<p>LK 2+H Veličine/Size: 05-06-07-08-09-10-11-12-13-14-15-16-17-18 - provrt redukovan za jednu veličinu sedlom za pritezanje/<i>Bore reduced one size by adapter sleeve</i> - standardno sedlo za pritezanje serije X23(00)/<i>Standard adapter sleeve series H23 (00)</i> - zaptivanje: metalogumena zaptivka + zaštitni lim/<i>Seals: Metal-rubber seal + metal shield</i> - trajno podmazan litijum/kalcijum mazivom/<i>Long life lithium/calcium grease</i> - ležaj i sedlo za pritezanje treba naručiti odvojeno/<i>Bearing and adapter sleeve to be ordered separately</i></p>

KUGLIČNI LEŽAJI ZA POLJOPRIVREDNE MAŠINE BALL BEARINGS FOR AGRICULTURAL MACHINES

LEŽAJNE JEDINICE BEARING UNITS

UNUTRAŠNJI PRSTEN INNE RING	TRAJNO PODMAZANI PERMANENTLY LUBRICATED		SA OTVOROM ZA PODMAZIVANJE WITH LUBRICATION GROOVE					
	CILINDRIČNI SPOLJNI PRSTEN CYLINDRICAL OUTER RING	SFERNI SPOLJNI PRSTEN SPHERICAL OUTER RING	CILINDRIČNI SPOLJNI PRSTEN CYLINDRICAL OUTER RING	SFERNI SPOLJNI PRSTEN SPHERICAL OUTER RING	CILINDRIČNI SPOLJNI PRSTEN CYLINDRICAL OUTER RING	SFERNI SPOLJNI PRSTEN SPHERICAL OUTER RING		
 	W208PP4 30,17 80 30,18 30,18 W208PP7 30,17 80 30,18 18 W208PP10 38,11 80 42,85 21 W208PP2 49,23 90 30,18 30,18 W210PP8 38,86 90 30,18 30,18 W211PP2 55,58 100 33,34 33,34	W200PPB2 38,11 80 42,96 18 W208PPB4 30,17 80 30,18 30,18 W208PPB7 30,17 80 30,18 18 W208PPB23 38,11 80 42,96 30,18 W209PPB2 45 85 30,18 30,18 W209PPB4 39 85 30,18 30,18 W208PPB11 45,24 85 36,53 22 W210PPB2 49,23 90 30,18 30,18 W210PPB5 45,34 90 30,18 30,18 W211PPB2 55,58 100 33,34 33,34	GW210PPB3 35,73 90 30,18 30,18 GW210PP9 49,40 90 36,53 23 GW211PP2 55,58 100 33,34 33,34 GW211PP4 42,16 100 33,34 33,34 GW211PP9 55,75 100 39,69 25 GW211PP13 45,34 100 33,34 25	GW209PPB2 45 85 30,18 30,18 GW209PPB4 39 85 30,18 30,18 GW209PPB11 45,24 85 36,53 22 GW209PPB12 44,83 85 42,85 22 GW210PPB2 49,23 90 30,18 30,18 GW210PPB5 45,34 90 30,18 30,18 GW211PPB2 55,58 100 33,34 33,34 GW211PPB8 55,58 100 33,34 25 GW211PPB9 55,75 100 39,69 25 GW211PPB10 49,23 100 33,34 33,34 GW211PPB13 45,34 100 33,34 25 GW211PPB14 51,18 100 33,34 25 GW211PPB15 55,58 100 55,55 25 GW211PPB16 55,58 100 40 25	GWST 209PPB12 44,831 127 42,85 40 GWST 209PPB40 40 127 42,85 40 GWST 211PPB15 55,58 140 55,55 44,7 LSST 211 X3-3 55 140 55 44,7			
		W207PP3 25 72 45 24 W208PP5 31,8 80 36,53 18 W208PP6 25,4 80 36,53 18 W208PP8 28,6 80 36,53 30,18 W208PP20 28,6 80 36,53 18 W209PP3 30 85 45 30,18 W210PP4 28,6 90 30,18 30,18 W211PP3 38,1 100 33,34 33,34 W211PP5 38,1 101,6 44,45 36,52	W208PPB5 28,6 80 36,53 18 W208PPB6 25,4 80 36,53 18 W208PPB8 28,6 80 36,53 30,18 W208PPB9 25,4 80 36,53 30,18 W208PPB11 22,2 85,74 36,53 30,18 W208PPB12 28,6 85,74 36,53 30,18 W208PPB13 22,2 80 36,53 18 W208PPB18 22,2 87,34 36,53 30,18 W208PPB19 28,6 87,34 36,53 30,18 W209PPB5 31,8 85 36,53 30,18 W209PPB7 31,8 87,34 36,53 30,18 W209PPB8 31,8 85 36,53 19 W209PPB30 30 90 45 29 W209PPB25 25 90 45 29 W210PPB4 28,6 90 30,18 30,18 W210PPB6 28,6 90 36,53 30,18 W211PPB3 38,1 100 33,34 33,34 W211PPB5 38,1 104,77 44,45 36,53 W211PPB6 38,1 103,56 44,45 36,53	GW208PP17 28,6 85,74 36,53 30,18 GW210PP4 28,6 90 30,18 30,18 GW211PP3 38,1 100 33,34 33,34 GW211PP17 38,1 100 44,45 33,34	GW208PPB5 28,6 80 36,53 21 GW208PPB6 25,4 80 36,53 21 GW208PPB8 28,6 80 36,53 30,18 GW208PPB12 28,6 85,74 36,53 30,18 GW208PPB17 28,6 85,74 36,53 30,18 GW209PPB5 31,8 85 36,53 30,18 GW209PPB8 31,8 85 36,53 22 GW209PPB26 25 85 42,85 22 GW209PPB3 30 85 45 30,18 GW210PPB4 28,6 90 30,18 30,18 GW211PPB3 38,1 100 33,34 33,34	GWST 209PPB26 25 127 42,85 40 GWST 209PPB31 30 127 42,85 40 GWST 209PPB3 30 127 45 40 GWST 211PPB40 40,5 140 45 44,7 GWST 211PPB40.X1 39,25 140 55,55 44,7 GWST 211PPB40.X2 35 140 55,55 44,7		
			205KRR2 22,25 52 25,4 15 206KPP3 25,43 62 24 16 206KRR6 25,43 62 24 16 207KPP3 31,77 72 37,7 17 207KRR17 31,77 72 25 17 W208KRR8 31,77 80 36,53 18	205KRRB2 22,25 52 25,4 15 205PPB13 22,25 52 25,4 15 206KPPB3 25,43 62 24 16 206KRRB6 25,43 62 24 16 207KPPB3 31,77 72 25 17 207KRRB9 28,6 72 37,7 17 207KRRB12 28,6 72 25 17 207KRRB17 31,77 72 25 17 W208PPB16 31,77 80 36,53 18 209KRRB2 38,12 85 30 19	G206KPP4 25,43 62 24 18	G206KPPB4 25,43 62 24 18 G206KRRB6 25,43 62 24 18 G207KPPB2 28,60 72 37,7 19 GW208KRRB5 31,77 80 36,53 21 GW208PPB22 31,88 80 36,53 21		



Fabrika kotrljajućih ležajeva i kardana FKL ad Temerin
Industrijska zona bb
21235 Temerin
SRBIJA

Tel. : +381 21 6841 100
Fax: +381 21 842 650

www.fkl-serbia.com

*FACTORY OF ROLLING BEARINGS AND CARDAN
SHAFTS - FKL
Industrijska zona bb
21235 TEMERIN
SERBIA*

*Phone: +381 21 6841 100
Fax: +381 21 842 650*

www.fkl-serbia.com

© Copyright FKL 2012

Sadržaj ove publikacije je zaštićeno autorsko pravo izdavača i ne može se reprodukovati (ni u izvodima), dok se ne dobije odgovarajuća dozvola. Sva je moguća pažnja preduzeta da se osigura tačnost i ispravnost informacija, koje sadrži ova publikacija, ali se ne može prihvatiti nikakva odgovornost za bilo kakvu grešku ili propust.

Pripremljeno u fabrici kotrljajućih ležajeva i kardanskih vratila Temerin, Republika Srbija

The contents of this publication are the copyright of the publisher and may not be produced (even extracts) unless permission is granted. Every care has been taken to ensure the accuracy of the information in this publication but no liability can be accepted for any errors or omissions. Prepared in Factory of rolling bearings and cardan shafts Temerin, Serbia

Fotografije i grafički dizajn/ Photos und Prepress: Monja Popović, *Master in Graphic Engineer and Design*
Štampa/Print: Štamparija Stojkov, Novi Sad